
FELDER®

FS 700 K FLEXIBLE AND SAFE EDGE FINISHING

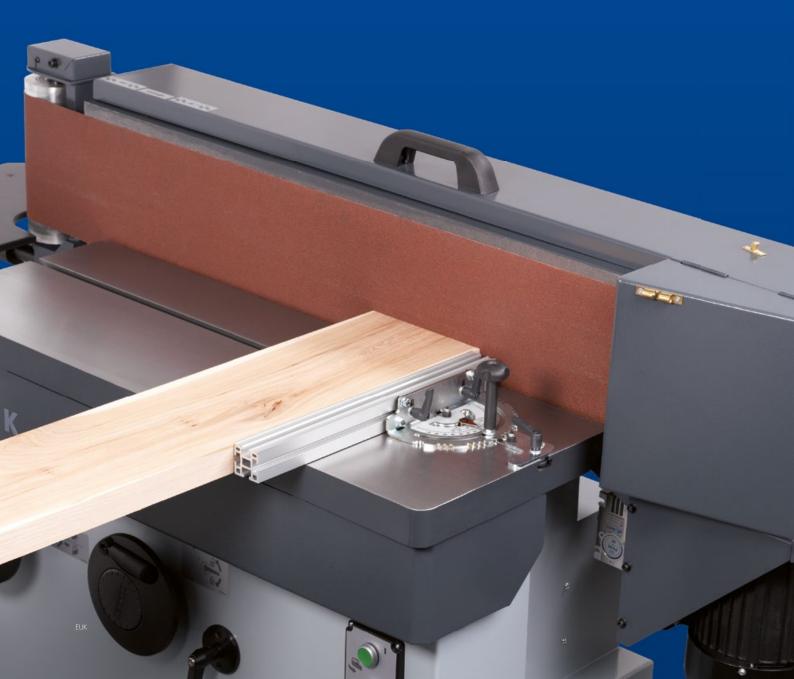

FELDER®

FS 700 K

Flexible and safe edge finishing



Ambitious edge sanding operations are even more effective and precise with the FS 700 K. Oscillation of the sanding belt, which can be activated at any time, ensures maximum use of the belt width of 200 mm. Handwheels are used to adjust the height of the cast iron table and the tilting of the sanding unit. An open design enables the machining of extra-long work-pieces which are safely guided on the large machine table. The height-adjustable auxiliary table can be used for the sanding of curves. The sturdy machine chassis features integrated storage compartments for sanding belts, which are protected from dust by a flap.



FS 700 K

- » Machining long workpieces
- » Sanding belt width 200 mm
- » Tiltable sanding unit
- » Height and angle adjustment via handwheel
- » Buffing of acrylic with polishing belt
- » Storage compartment in the chassis

... Your decision for Felder, a risk-free decision

- » The right machine for every budget
- » Complete reliability in professional use
- » Tailor made machine solutions
- » High quality cast iron machine table and agareaates
- » Innovative detail solutions derived from 65 years of experience already included in the standard configuration
- » First class manufacturing and finishing standards
- » Intuitive application concepts
- » Modern, distinct design
- » Quality and precision from AUSTRIA
- » Powerful and efficient
- » Complete package: Comprehensive service support

EUK.

4 | FS 700 K Edge sanders

The most important highlights at a glance



Processing long workpieces

The sturdy machine table and the hinged extraction unit make it possible to machine extra-long workpieces.



Table height adjustment

The machine table is adjustable in height by means of a handwheel.



Machine table with T-slot

A T-slot is integrated in the machine table to mount fences.



Additional table

The height-adjustable auxiliary table can be used for the sanding of curves.



Tiltable sanding unit

The sanding unit can be tilted with a handwheel.



Dust protected storage trays

Lockable trays for the storage of sanding belts.

EUK

Technical specifications

	FS 700 K
Sanding belt support length	1.050 mm
Sanding belt dimensions	3.000 ×200 mm
Swivel range sanding unit	90° – 45°
Table height adjustment	125 mm
Table size	350 mm x 960 mm
Grinding wheel diameter	Ø 100 mm
Belt speed	19 m/s (50Hz) 23 m/s (60Hz)
Vacuum connection	Ø 140 mm
Motor power	3,0 kW
Net weight (standard configuration)	210 kg





Perfect woodworking with FELDER machines





K 500



Product range













Dowel Boring Machine, Drilling Machine and Horizontal Mortiser











Wide Belt Sanding Machines







































Edgebanders G 560 / G 580 classic

G 500 EX

G 330

G 263

G 220

ForKa 300 S eco

Vertical panel saw



Extraction Units &































Briquetting Presses

RL 250

RL 160







EUK

FBP 50/60/70













FELDER Quality and precision in a nutshell

Since 1956, a guarantee for perfect results with excellent ease of use and reliability in regular professional use. Woodworkers are always enthusiastic about the individual and solid solutions for small and mid-sized businesses.

FELDER GROUP

KR-Felder-Straße 1 A-6060 HALL in Tirol

- Tel. +44 1908 635000
 <u>www.felder.uk</u>
 <u>Contact</u>
- Tel. +353 906625756www.felder.ieContact
- Tel. 1800 274 3040
 <u>www.felder.in</u>
 <u>Contact</u>
- Tel. +43 5223 58500 <u>www.felder.int</u> Contact