FELDER®

ForKa 200 eco plus

NOW WITH EVEN MORE PERFORMANCE! THE FLEXIBLE EDGEBANDER FOR STATIONARY AND MOBILE USE



ForKa 200 eco plus

Now with even more performance! The flexible edgebander for stationary and mobile use

Panel material



ForKa 200 eco plus

» Edge thickness 0.4–3 mm
» Workpiece thickness: 10–60 mm
» Variable feed speed with comfort control
» Warm-up time: 4 min to 120°C

Mobile manual edgebander with gluepot for stationary and mobile use during assembly work The ForKa 200 eco plus manual edgebander is used for both straight as well as curved workpieces with concave/convex edge designs.

» Processing of ABS, PVC and wooden edge material
» Depending on the type of edge material, a minimum inner radius of 25 mm is possible
» Scale setting used for edge thickness adjustment
» Quick warm-up time with quick heating gluepot
» Flexibility through the use of melting glue granulate
» Fine adjustable glue application
» Edge thickness 0.4–3 mm



VIDEO

… Your decision for Felder, a risk-free decision


» The right machine for every budget
» Complete reliability in professional use
» Tailor made machine solutions
» High quality cast iron machine table and aggregates
» Innovative detail solutions derived from 70 years of experience – already included in the standard configuration
» First class manufacturing and finishing standards
» Intuitive application concepts
» Modern, distinct design
» Quality and precision from AUSTRIA
» Powerful and efficient
» Complete package: Comprehensive service support

EUK

The most important highlights at a glance



Suitable for ABS, PVC and wood edges
Processing of edging materials with an edge thickness of 0.4–3.0 mm and a height of 10–60 mm.

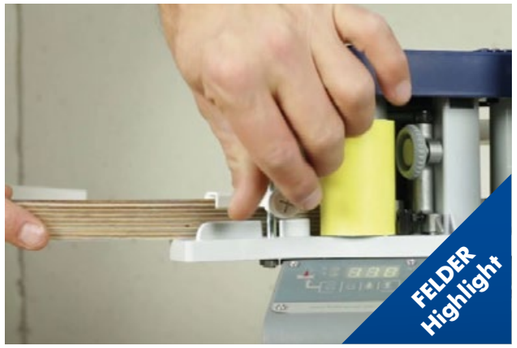

Selection of edge materials
Maximum flexibility with regards to the choice of the edge banding material, thanks to the precisely adjustable application of hot-melt adhesive to the edgebands.



Quick warm-up time with quick heating gluepot
Coated gluepot for easy, residue-free cleaning

Technical specifications


Frequency (Hz)	50
Internal radius in mm	25
Edge thickness in mm	0,4–3,0
Panel thickness in mm	10–60
Voltage in V	1x 230
Infeed speed m/min	2.0–6.0 (continuously variable)


Details



For straight and curved workpieces
Ideal for straight edgebanding work as well as curved pieces with concave or convex edge design. Extremely tight inner and outer radii can be processed.

Continuously variable temperature control
Extending the bonding time of the adhesive by controlling the temperature between 120–200°C.

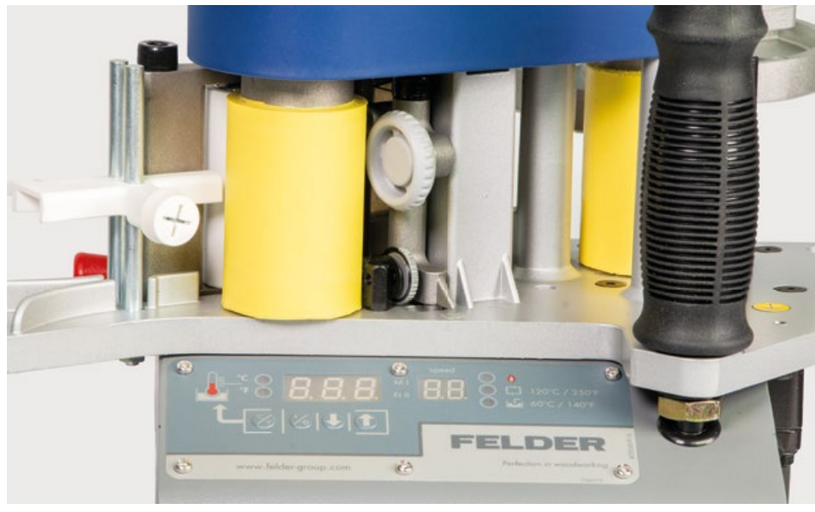

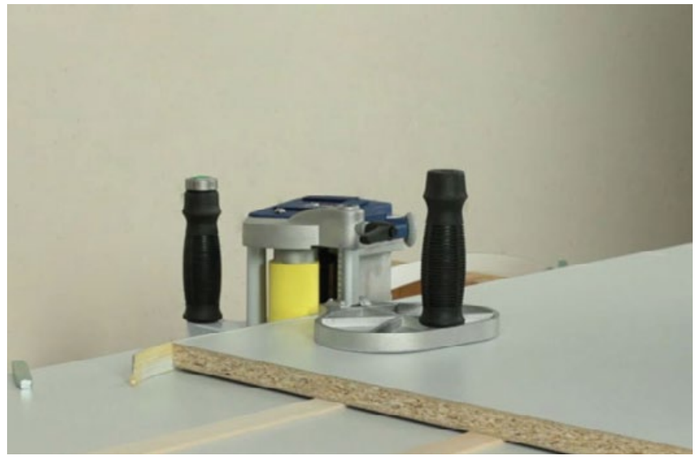

Stationary Use
Conversion to become a stationary edgebander using the accompanying mounting plate.

Product range



K 945 S/PCS® K 945 S x-motion/PCS® K 740 S/PCS® K 740 S x-motion/PCS® K 740 professional/PCS® K 740/PCS®



K 700 S/PCS® K 700 professional/PCS® K 700/PCS® K 540 S K 500 S K 500 professional K 500

Sliding Table Panel Saws



F 900 M F 900 Z F 700 M F 700 Z F 500 MS F 500 M

Spindle Moulders



AD 951 AD 941 AD 741 AD 531 A 951 L A 941 D 951 D 963

Planers



FB 940 RS FB 740 RS FB 940 S/SW FB 740 S/SW FB 940/840 FB 740/640 FB 710 FB 610 FB 510

Bandsaws



KV 925

Industrial Panel Saw



FW 1352 perform
FW 1352 classic
FW 1102 perform
FW 1102 classic
FW 950 classic
FW 850 classic

Wide Belt Sanding Machines



G 383 G 363/R G 330 G 263 G 220 ForKa 300 S eco

Edgebanders



KF 700 S professional KF 700 professional KF 700 KF 500 professional KF 500

Saw/Spindle Moulders



CF 741 S professional CF 741 professional CF 741 CF 531 professional CF 531

Combination Machines



FD 29 professional FD 21 professional FD 250

Dowel Boring Machine,
Drilling Machine & Horizontal Mortiser



MVP 31.14 flex

Membrane Press



structura 60.02 structura 40.02

Brushing Machines



FS 722 FS 900 KF FS 700 K

Belt- & Edge Sanders



RL 350 perform RL 350 RL 300 RL 250 RL 200 RL 160 RL 140 RL 125



AF 35 AF 30 AF 25 AF 22-D200 AF 22 M/W/S AF 16 AF 14 AF 12 FBP 50/60/70

Extraction Units & Briquetting Presses

FELDER®

FELDER Quality and precision in a nutshell

Since 1956, a guarantee for perfect results with excellent ease of use and reliability in regular professional use. Woodworkers are always enthusiastic about the individual and solid solutions for small and mid-sized businesses.

FELDER GROUP
KR-Felder-Straße 1
A-6060 HALL in Tirol

(UK) Tel. +44 1908 635000
www.felder.uk
Contact

(IE) Tel. +353 906625756
www.felder.ie
Contact

(IN) Tel. 1800 274 3040
www.felder.in
Contact

(INT) Tel. +43 5223 58500
www.felder.int
Contact

© 05/2023 FELDER KG · KR-Felder-Straße 1, 6060 HALL in Tirol, AUSTRIA · www.felder-group.com
Technical data are subject to change without notice. No liability is taken to content or printing errors.
The machines are occasionally pictured with optional equipment. Images may differ from the original. Picture is not binding.